



31 360 DC0 MINTA TOUCH ELECTRONIC SINGLE-LEVER SINK MIXER 1/2"

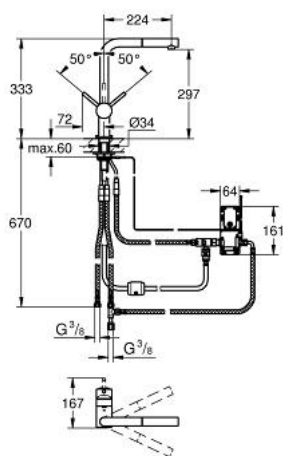

PRODUCT DESCRIPTION

- Colour: supersteel
- single hole installation
- Touch: activation of cold water via skin contact
- battery supply 6 V lithium-battery, type CR-P2
- CE approved
- indication of battery status by different impulses
- safety shutdown circuit
- solenoid valve
- automatic safety stop after 60 sec. (factory set)
- type of protection IP 44
- GROHE SilkMove 46 mm ceramic cartridge
- GROHE Long-Life finish
- L-spout
- adjustable flow rate limiter
- swivel tubular spout
- swivel area 360°
- pull-out mousseur
- automatic returning
- integrated non-return valve
- flexible connection hoses
- rapid installation system
- protected against backflow
- optional:
 - upgrade for Touch function with mixed water:
 - Grohtherm Micro 34 023 000
 - connection set 47 533 000
 - min. recommended pressure 1.0 bar

31 360 DC0 MINTA TOUCH ELECTRONIC SINGLE-LEVER SINK MIXER 1/2"

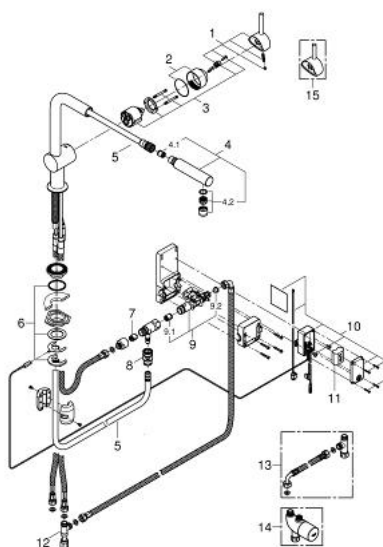

SPARE PARTS, September 2013 – now

- 1: Lever (Order-nr. 46015DC0)
- 2: Cap (Order-nr. 46025DC0)
- 3: Cartridge (Order-nr. 46048000)
- 4: Pull out spray (Order-nr. 46858DC0)
- 4.1: Non-return valve (Order-nr. 08565000)
- 4.2: Mousseur (Order-nr. 13967DC0)
- 5: Shower hose (Order-nr. 46881000)
- 6: Shank mounting kit (Order-nr. 46345000)
- 7: Non-return valve (Order-nr. 08565000)
- 8: Quick coupling (Order-nr. 46338000)
- 9: Solenoid valve (Order-nr. 48213000)
- 9.1: Non-return valve (Order-nr. 08565000)
- 9.2: Dirt strainer (Order-nr. 42395000)
- 10: Control unit (Order-nr. 48214000)
- 11: Battery (Order-nr. 42886000)
- 12: Original WAS® T-piece 3/8" (Order-nr. 41007000)
- 13: Connection set (Order-nr. 47533000)*
- 14: Thermostatic scalding protection (Order-nr. 34487000)*
- 15: Lever (Order-nr. 40684DC0)*

*Special accessories