



38 623 000 **RAPID SL FOR WC**

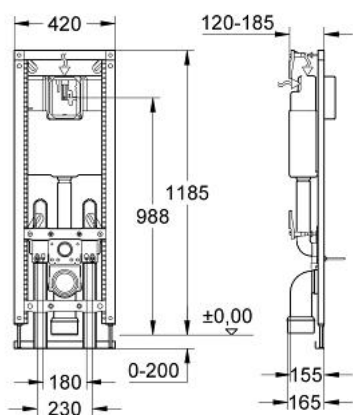

PRODUCT DESCRIPTION

- flushing cistern 6 l
- 1.20 m installation height
- 0.42 m wide
- for on-the-wall installations
- steel frame with foil coating/hot galvanized, self-supporting
- for dry-cladding, completely pre-assembled
- height adjustable fitting connections
- fixing material
- 2 WC fixing bolts
- distance of fixing bolts 180/230 mm
- outlet bend Ø 80 mm
- reducer Ø 80/100 mm
- inlet and outlet connecting set
- pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush
- low noise (group I acc. to German Noise Specification)
- insulated against condensation
- angle valve 1/2"
- water inlet with pipe fixation
- accessories for on-the-wall installation
- without flush plate/actuation
- GROHE Water Saving - Less water, perfect flow

38 623 000 **RAPID SL FOR WC**

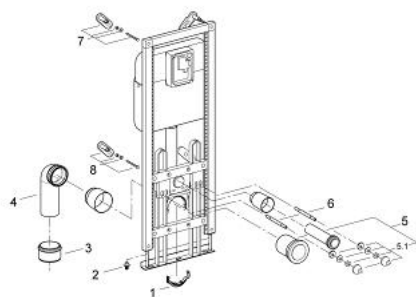

SPARE PARTS, October 2004 – now

- 1: Fixing set (Order-nr. 42947000)
- 2: Hoop (Order-nr. 42949000)
- 3: Nut, 2 Pcs (Order-nr. 4295100M)
- 4: Transition piece 90/110 to Rapid SL (Order-nr. 42242000)
- 5: Outlet elbow (Order-nr. 43909000)
- 6: WC inlet and outlet connecting set (Order-nr. 37311K00)
- 6.1: Basin fastening (Order-nr. 43511SH0)
- 6.2: Connector (Order-nr. 37119000)
- 7: Threaded bolt (Order-nr. 43023000)
- 8: Wall holder (Order-nr. 42954000)
- 9: Wall Holder (Order-nr. 42952000)
- 10: Accessories (Order-nr. 42185000)*

*Special accessories