


38 951 000 **SOLIDO SET 3 IN 1**

**PRODUCT DESCRIPTION (1/2)**

- with flushing cistern GD 2, 6 - 9 l
- small maintenance access
- 1.13 m installation height
- for on-the-wall installations or studded walls
- powder coated steel frame, self-supporting
- for dry-cladding, completely pre-assembled
- with fixed connections
- quick adjustment, lockable
- fixing material
- TÜV approved
- 2 WC fixing bolts
- fixing device for ceramic
- WC ceramics with small bearing area (less than 205 mm) require additional accessory 38 779 000
- distance of fixing bolts 180/230 mm
- outlet bend Ø 80 mm
- depth adjustable
- reducer Ø 80/100 mm
- inlet and outlet connecting set
- leakage box
- collection pan with wastewater lead-through and connection for spill, white
- leakage / slash water cladding for elements
- flushing cistern GD 2, 6 - 9 l
- adjustment ex factory 6 l and 3 l
- pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush
- water supply from left/right or back
- low noise (group I acc. to German Noise Specification)
- insulated against condensation
- angle valve 1/2"
- water inlet with pipe fixation

Pure Freude  
an Wasser




38 951 000 **SOLIDO SET 3 IN 1**

**PRODUCT DESCRIPTION** (2/2)

- no tools required for the installation of the inspection shaft including protection during construction phase
- for vertical or horizontal use
- accessories for on-the-wall installation
- installation on site
- including flush plate Nova Cosmopolitan
- vertical and horizontal installation
- 156 x 197 mm
- material: ABS
- chrome

## 38 951 000 **SOLIDO SET 3 IN 1**

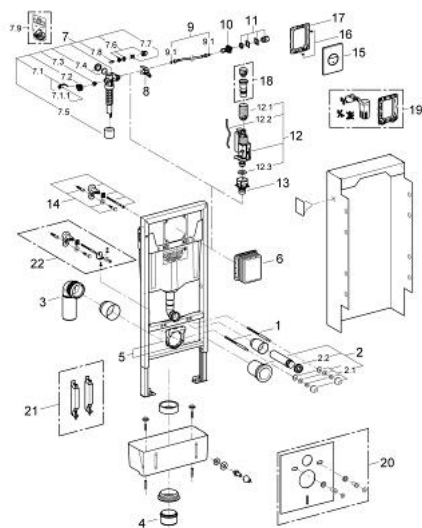

### **SPARE PARTS**, April 2011 – now

- 1: Threaded bolt (Order-nr. 4276400M)
- 2: WC inlet and outlet connecting set (Order-nr. 37311K00)
- 2.1: Basin fastening (Order-nr. 43511SH0)
- 2.2: Connector (Order-nr. 37119000)
- 3: PP-outlet bend Ø 90 mm (Order-nr. 42327000)
- 4: Transition piece 90/110 to Rapid SL (Order-nr. 42242000)
- 5: Support for outlet bend (Order-nr. 42243000)
- 6: Inspection shaft (Order-nr. 66791000)
- 7: Filling valve (Order-nr. 37095000)
- 7.1: Lever (Order-nr. 43734000)
- 7.1.1: Seal (Order-nr. 4377000M)
- 7.2: Valve head (Order-nr. 43536000)
- 7.3: Membrane (Order-nr. 4375800M)
- 7.4: Screw cap (Order-nr. 43735000)
- 7.5: Valve float, 5 pcs. (Order-nr. 4379100M)
- 7.6: Set of seals (Order-nr. 43722000)\*
- 8: Support device (Order-nr. 42246000)
- 9: Connecting hose (Order-nr. 42397000)
- 9.1: Sealing washer (Order-nr. 0319100M)
- 10: Angle valve (Order-nr. 42396000)
- 11: Water supply pipe connector (Order-nr. 38338000)
- 12: Dual Flush discharge valve AV1 (Order-nr. 42320000)
- 12.1: Extension for overflow pipe (Order-nr. 42313000)
- 12.2: Pneumatic hose (Order-nr. 42319000)
- 12.3: Seal (Order-nr. 42310000)
- 13: Valve seat for GD2 (Order-nr. 42315000)
- 14: Wall brackets (Order-nr. 3855800M)
- 15: Top plate with push button (Order-nr. 42375000)
- 16: Screw (Order-nr. 6636200M)
- 17: Mounting frame (Order-nr. 43207000)
- 18: Retrofit set (Order-nr. 38796000)\*
- 19: Xtra wall brackets, flexible placing (Order-nr. 38733000)\*
- 20: Set for noise protection (Order-nr. 37131000)\*
- 21: Accessory (Order-nr. 38779000)\*
- 22: 4.5 l adapter for GD2 (Order-nr. 42333000)\*

\*Special accessories